



Pad For Mini Caliper




High μ pad available.

● For Mini Caliper

Model NO.	Applicable Model	A	B	C	D	E	Pad Wear Allowance (mm)
DB-0428-K01※	DB-3004A, M, H	30	15	12.7	5.2	$\phi 3.5$	2
DB-0429-K01※	DB-3005A, M, H	40	23	17	5.5	$\phi 4$	2
DB-0430-K01※	DB-3002A, M	50	30	22	12	$\phi 6$	5
DB-0431-K01※	DB-3003A	50	30	17	7	$\phi 6$	3

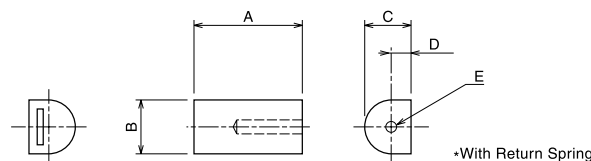


Pad For SA Pneumatic Disc Brake




High μ pad available.

Model NO.	Applicable Model	A	B	C	Pad Wear Allowance (mm)
DB-0455-K01※	DB-3038A, AF-01	186	135	30	20
DB-0455-K02※	DB-3038A, AF-11	186	135	30	20
DB-0455-K03※	DB-3038A, AF-21	186	135	30	20
DB-0454-K01※	DB-3039A, AF-01	260.5	200	35	20
DB-0454-K02※	DB-3039A, AF-11	260.5	200	35	20
DB-0454-K03※	DB-3039A, AF-21	260.5	200	35	20

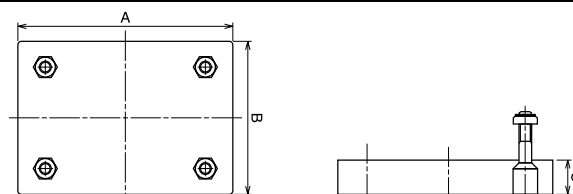


Pad For Hydraulic Posi. Clamper




High μ pad available.

● Posi. Clamper

Model NO.	Applicable Model	A	B	C	D	E	Pad Wear Allowance (mm)
DB-0480-K01※	PC-140A, Y	28	18	14	13	5.6	2
DB-0481-K01※	PC-200A, Y	35	25	18	17	6	2
DB-0482-K01※	PC-300A, Y	42	32	22	20	8	2
DB-0483-K01※	PC-450A, Y	58	48	32	30	9	2
DB-0484-K01※	PC-650A, Y	80	70	52	50	10	2

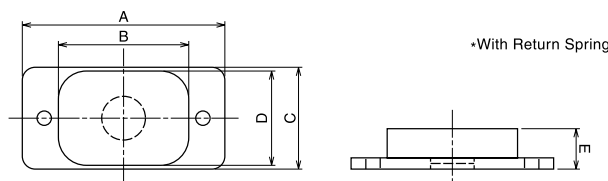


Pad For Hydraulic Nega. Clamper

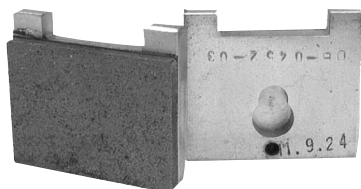

● For Hydraulic Nega. Clamper

Model NO.	Applicable Model	A	B	C	D	Pad Wear Allowance (mm)
DB-0452-K03※	DB-5503YF-05	75	65	55	15	3
DB-0452-K53※	DB-5503YF-55	75	65	55	23	3
DB-0451-K03※	DB-5508YF-05	125	100	90	17	3
DB-0451-K53※	DB-5508YF-55	125	100	90	25	3
DB-0450-K04※	DB-5520YF-06	186	150	135	22	3
DB-0450-K54※	DB-5520YF-56	186	150	135	30	3

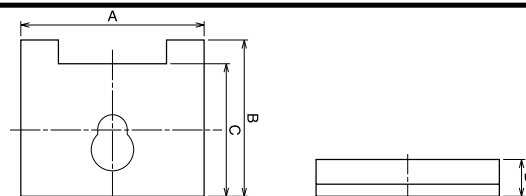

*Dimensions and specifications might be changed for improvement without notice.