


Clutch/Brake Unit with Motor(Stand Type) Some are made to order.

JEM-02, 05, 1A, 2A

Model	Clutch/Brake				Motor		Mass (kg)
	Static friction torque (Nm)	Rated voltage (DC-V)	Power consumption at 75°C(W)		Capacity(kW)	Voltage, Frequency, Pole	
JEM-02	6	24	8	8	0.2	AC200/220V 50/60Hz 4P	11
JEM-05	12	24	11	11	0.4		16
JEM-1A	25	24	16	14	0.75		27
JEM-2A	50	24	23	20	1.5		39

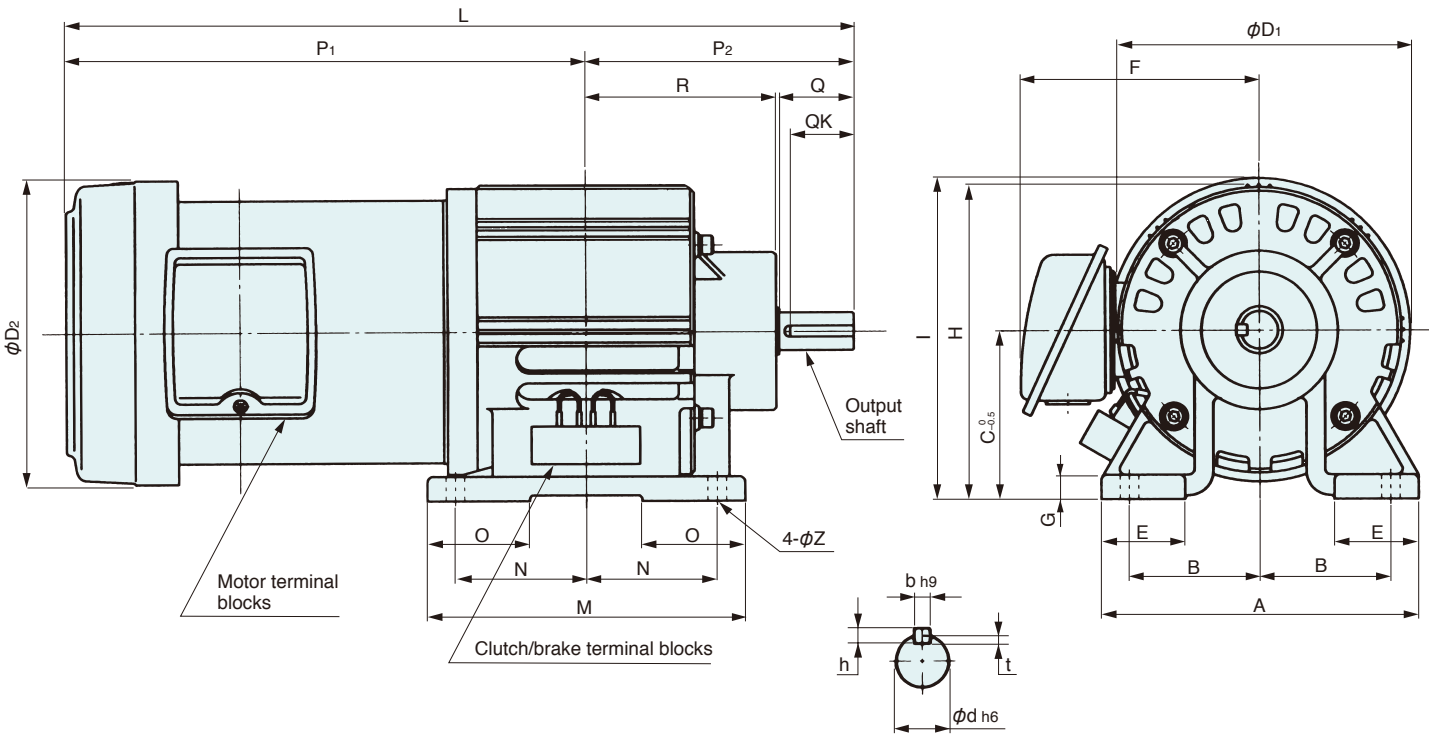

Unit : mm

Model	Diameter direction										Shaft direction	
	A	B	C	D ₁	D ₂	E	F	G	H	I	L	M
JEM-02	130	55	71	116	131	40	118	9	130.5	136	327.5	130
JEM-05	150	62.5	80	132	131	45	118	11	147.5	145.5	364.5	150
JEM-1A	170	70	90	152	162	45	128	13	167.5	171	428	170
JEM-2A	190	80	112	190	187	60	144	15	207	205.5	504	200

Model	Shaft direction						Shaft end					
	N	O	P ₁	P ₂	R	Z	Q	QK	d	b	h	t
JEM-02	55	38	231.5	96	69.5	7	25	21	12	4	4	2.5
JEM-05	62.5	47	249.5	115	83.5	10	30	25	15	5	5	3
JEM-1A	70	55	284.5	143.5	102	10	40	34	20	6	6	3.5
JEM-2A	80	60	328	176	123.5	12	50	42	25	8	7	4

Warner Clutches/Brakes

No.1 in basic performance

Warner

Series

With legendary performance and reliability in countless field-proven installations, Warner clutches/brakes can handle your toughest tasks. In addition to automatic gap adjustment that established Warner's position, high torque and impressive thermal dissipation characteristics, we also provide a compact size and ease of mounting to make your next machine automation endeavor a success. As one of the best electromagnetic clutches/brakes, it can easily withstand heavy, high frequency operation while still allowing highly precise on/off times.

