



MP

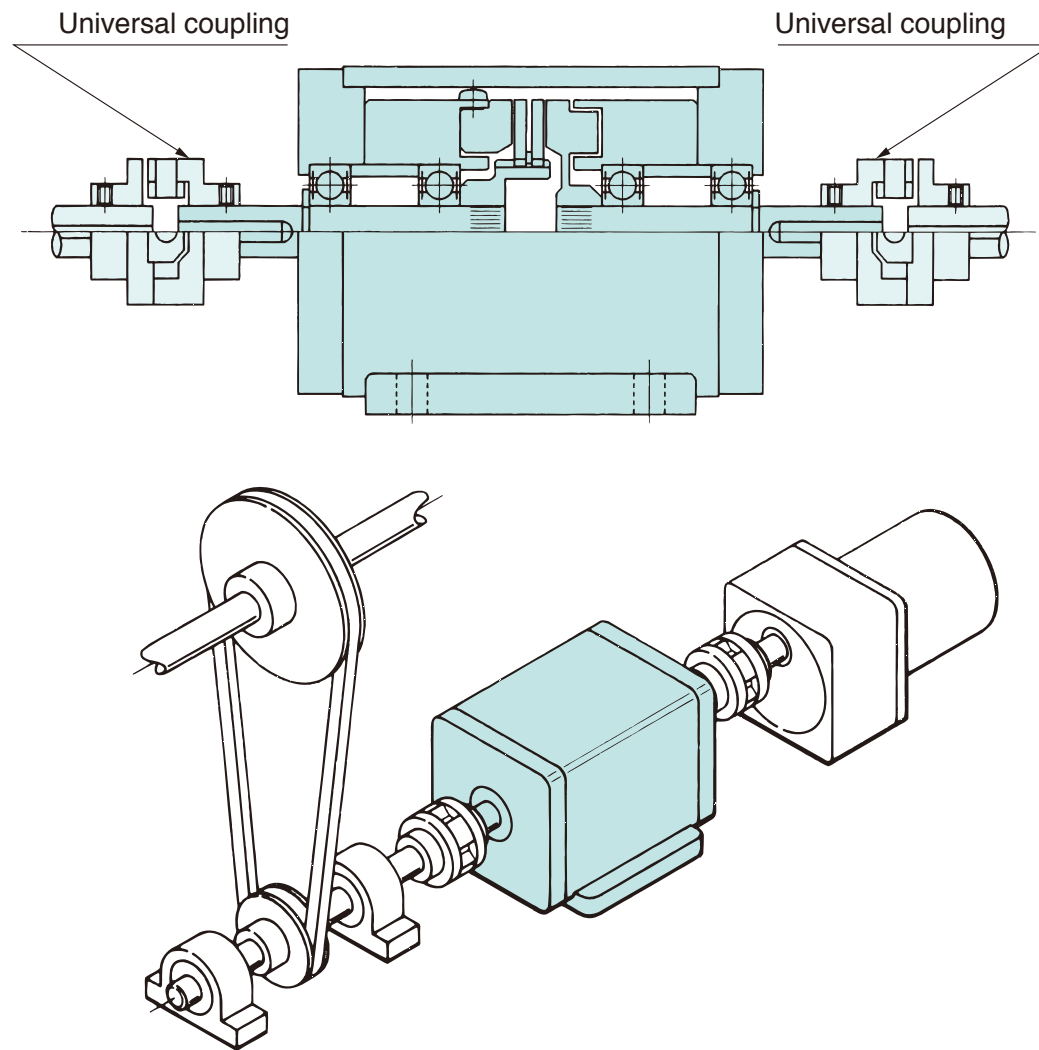

Clutch

BO-3.5, 4, 4.8, 5, 6, 7, 9

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
BO-3.5	0.25	24	2	0.14
BO-4	0.5	24	4.6	0.15
BO-4.8	1.2	24	5	0.30
BO-5	2	24	6.4	0.38
BO-6	4	24	10.6	0.55
BO-7	7	24	10	0.66
BO-9	15	24	12	1.7

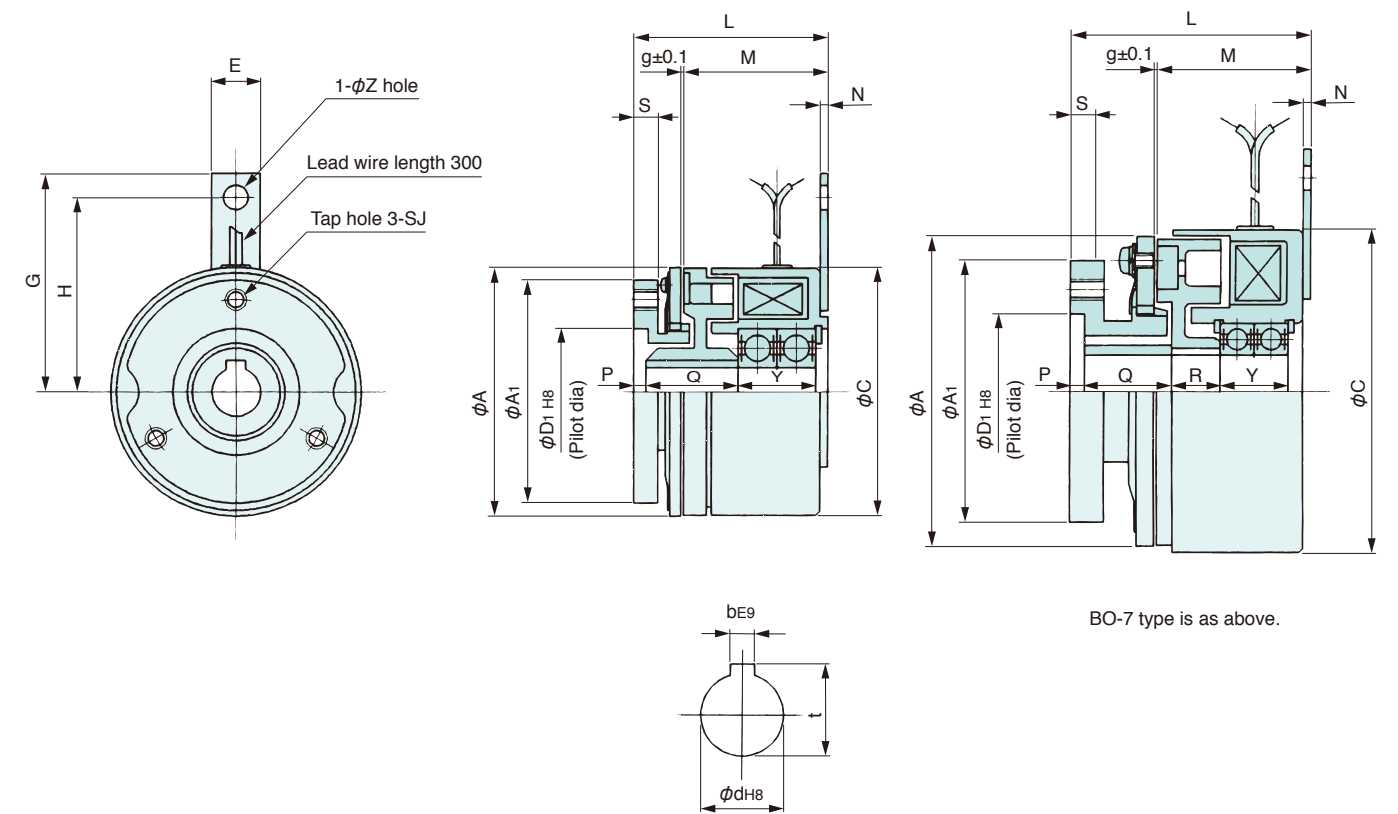

BO-7 type is as above.

Unit : mm

Model	Diameter direction							Shaft direction										Attachment SJ		Shaft hole		
	A	A ₁	C	D ₁	E	G	H	L	M	N	P	Q	R	S	Y	g	Z	P.C.D	Tap	d	b	t
BO-3.5	33.5	27	35	15	10	35	30	32.5	22	1.6	2	19	—	4	10	0.2	3.2	22	M3x0.5	6	2	6.9
BO-4	36.5	27	38	15	10	35	30	32.5	22	1.6	2	19	—	4	10	0.2	3.2	22	M3x0.5	6	2	6.9
BO-4.8	48	37	48	22	10	43	38	38	27	1.6	2.5	19	—	5	14	0.3	5	30	M3x0.5	8	2.5	8.9
BO-5	51.3	46	51	26	10	45	40	40	29.5	1.6	3	18.5	—	5	16	0.3	5	38	M4x0.7	10	4	11.5
BO-6	58.5	50	61	28	12	50	44	45	31.5	1.6	3	23	—	6	16	0.3	5	42	M4x0.7	12	4	13.5
BO-7	64	54	67	32	12	50	44	48	30.3	1.6	3	18	10	7	14	0.3	5	42	M4x0.7	15	5	17
BO-9	86	66	91	35	12.7	56.3	51.5	58	42	1.6	4	30.5	—	6	20	0.4	5	56	M5x0.8	17	5	19