



Installation Example

HO

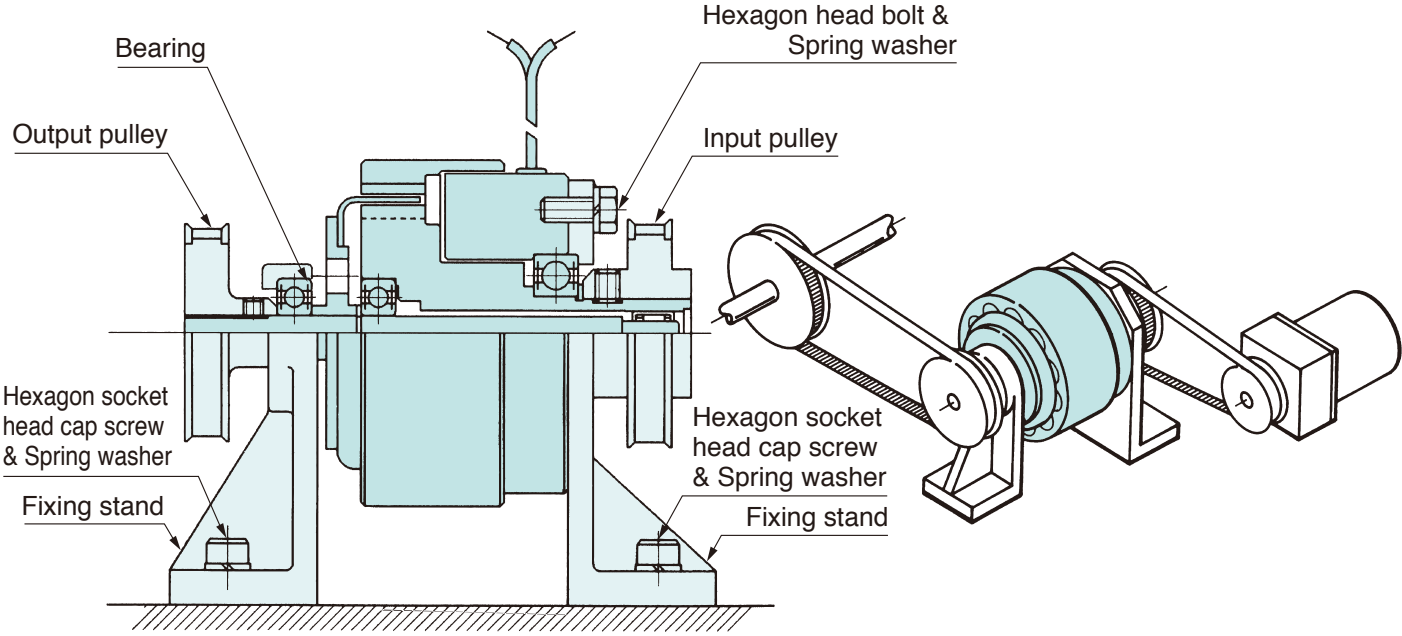


HB

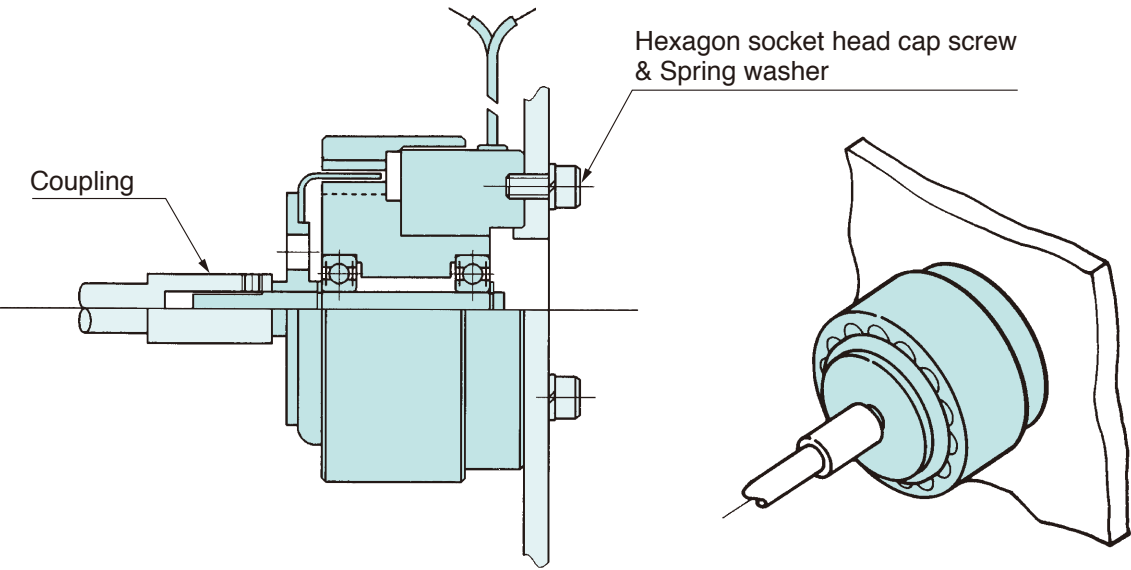

Clutch

HO-0.6, 1.2, 2.5, 5, 10

Model	Rated torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
HO-0.6	0.06	24	9.6	0.46
HO-1.2	0.12	24	11.6	0.70
HO-2.5	0.25	24	12.8	1.0
HO-5	0.5	24	14.6	1.7
HO-10	1	24	17.4	4.0

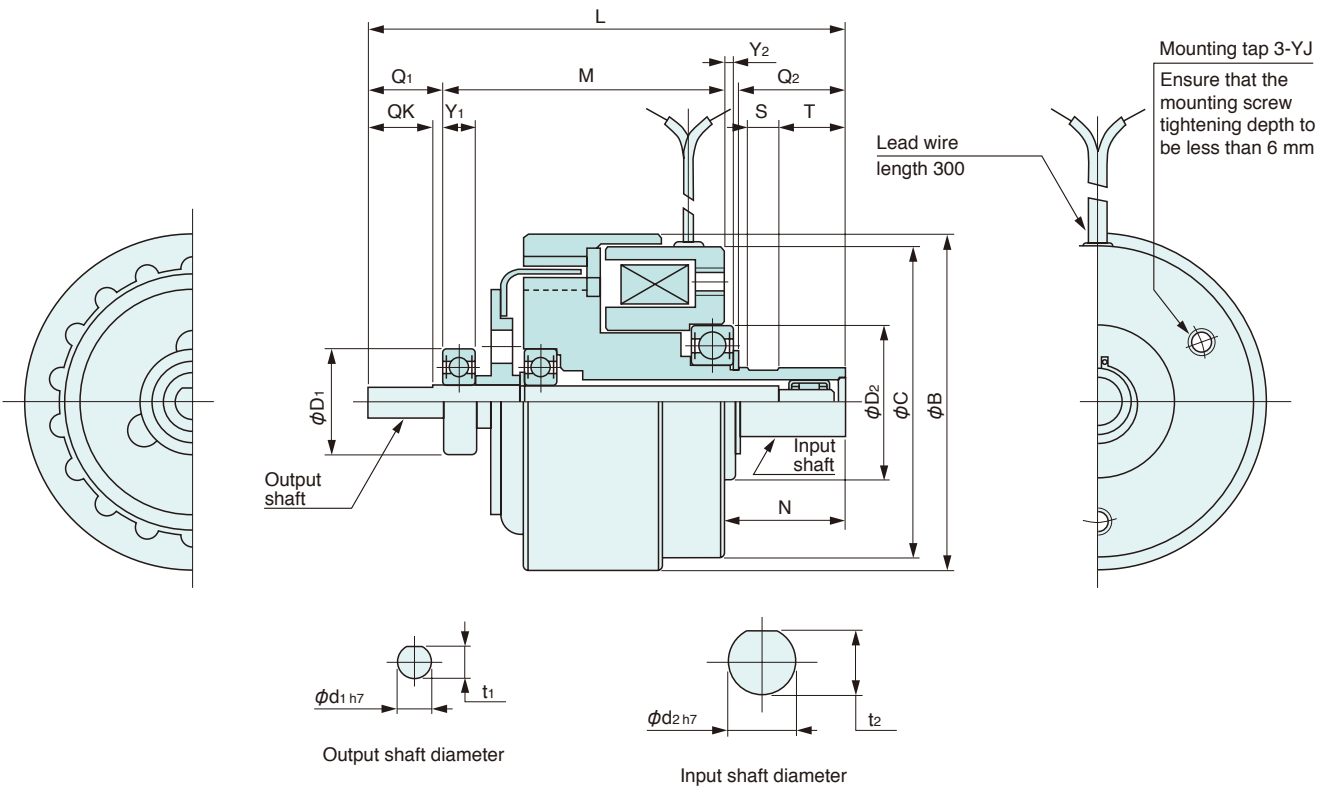

Unit : mm

Model	Diameter direction				Shaft direction							Attachment		Shaft end							
	B	C	D ₁	D ₂	L	M	N	S	T	Y ₁	Y ₂	P.C.D	YJ Tap	Q ₁	Q ₂	QK	d ₁	d ₂	t ₁	t ₂	
HO-0.6	52	48	16	26	81	47	21	6	10	5	2	36	M5×6	13	18	11	5	10	4.5	9.5	
HO-1.2	60	56	19	28	92	55	23	6	12	6	2	40	M5×6	14	20	12	6	12	5.5	11.5	
HO-2.5	70	64.6	22	32	100	59	25	6	14	7	2	50	M5×6	16	22	14	7	14	6.5	13.5	
HO-5	85	78	24	35	110	64	28	6	16	8	3	60	M5×6	18	24	16	8	16	7.5	15.5	
HO-10	112	105	26	42	121	68	31	6	18	8	3	70	M5×6	22	26.8	20	10	18	9.5	17.5	