


Brake

JB-0.6, 1.2, 2.5, 5

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
JB-0.6	6	24	8	0.65
JB-1.2	12	24	11	1.1
JB-2.5	25	24	14	1.8
JB-5	50	24	20	3.1

SEL&B

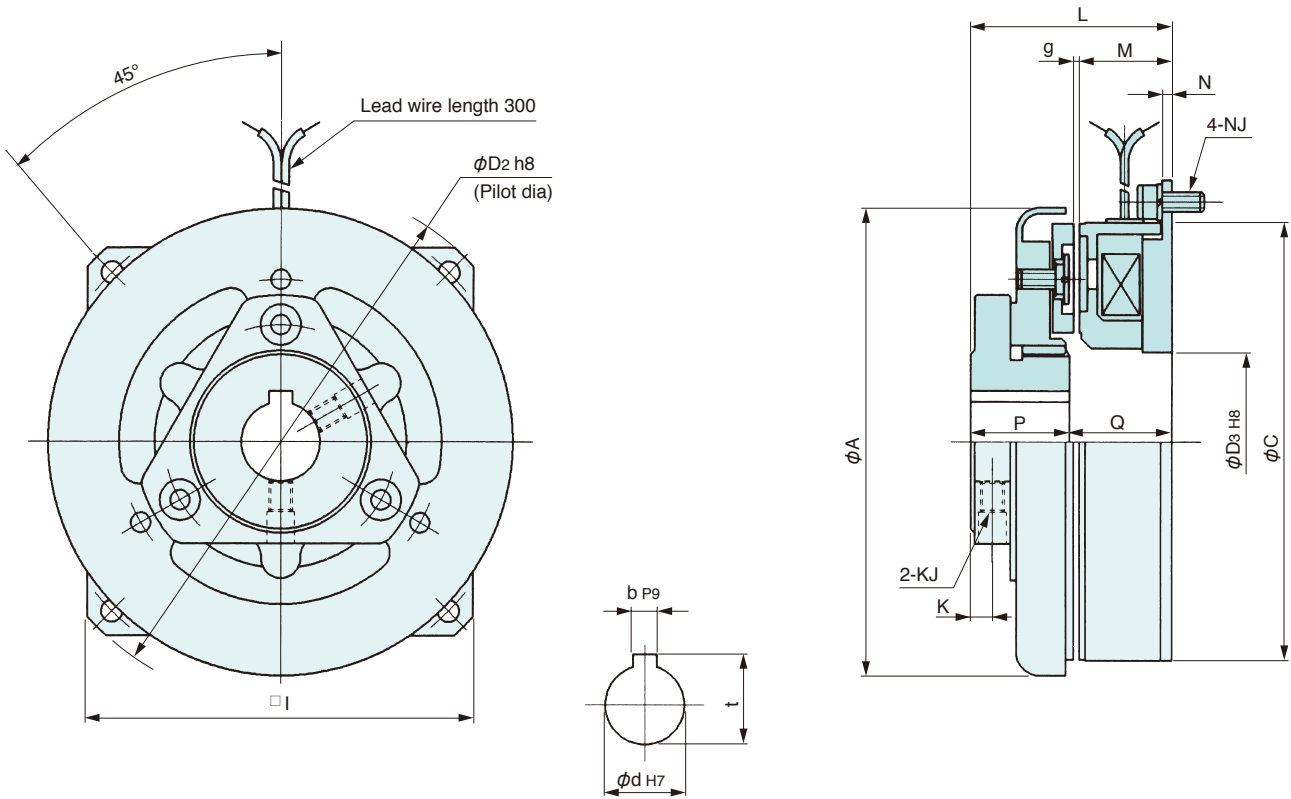

Unit : mm

Model	Diameter direction					Shaft direction			
	A	C	D ₂	D ₃	I	L	M	N	P
JB-0.6	76	70.3	88	25	70	40	21	2	18
JB-1.2	96	90.4	108	33	90.5	43	21	2	21
JB-2.5	118	110.5	132	45	110.5	51	24.5	2.5	25
JB-5	145	135.6	163	54	136	57	26.5	3	28


Model	Shaft direction		Attachment				Shaft hole		
			K	KJ	NJ				
	Q	g			P.C.D	Bolt	d	b	t
JB-0.6	22	0.4	4.2	M4	79	M4×10	12	4	13.8 ^{+0.1} ₀
JB-1.2	22	0.4	4.7	M5	99	M4×10	15	5	17.3 ^{+0.1} ₀
JB-2.5	26	0.5	5.5	M6	121	M5×12	20	6	22.8 ^{+0.1} ₀
JB-5	29	0.5	6	M6	149	M6×16	25	8	28.3 ^{+0.2} ₀

Brake

JB-10, 20, 40

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
JB-10	100	24	31	5.7
JB-20	200	24	40	11.5
JB-40	400	24	46	21.5

SEL&B

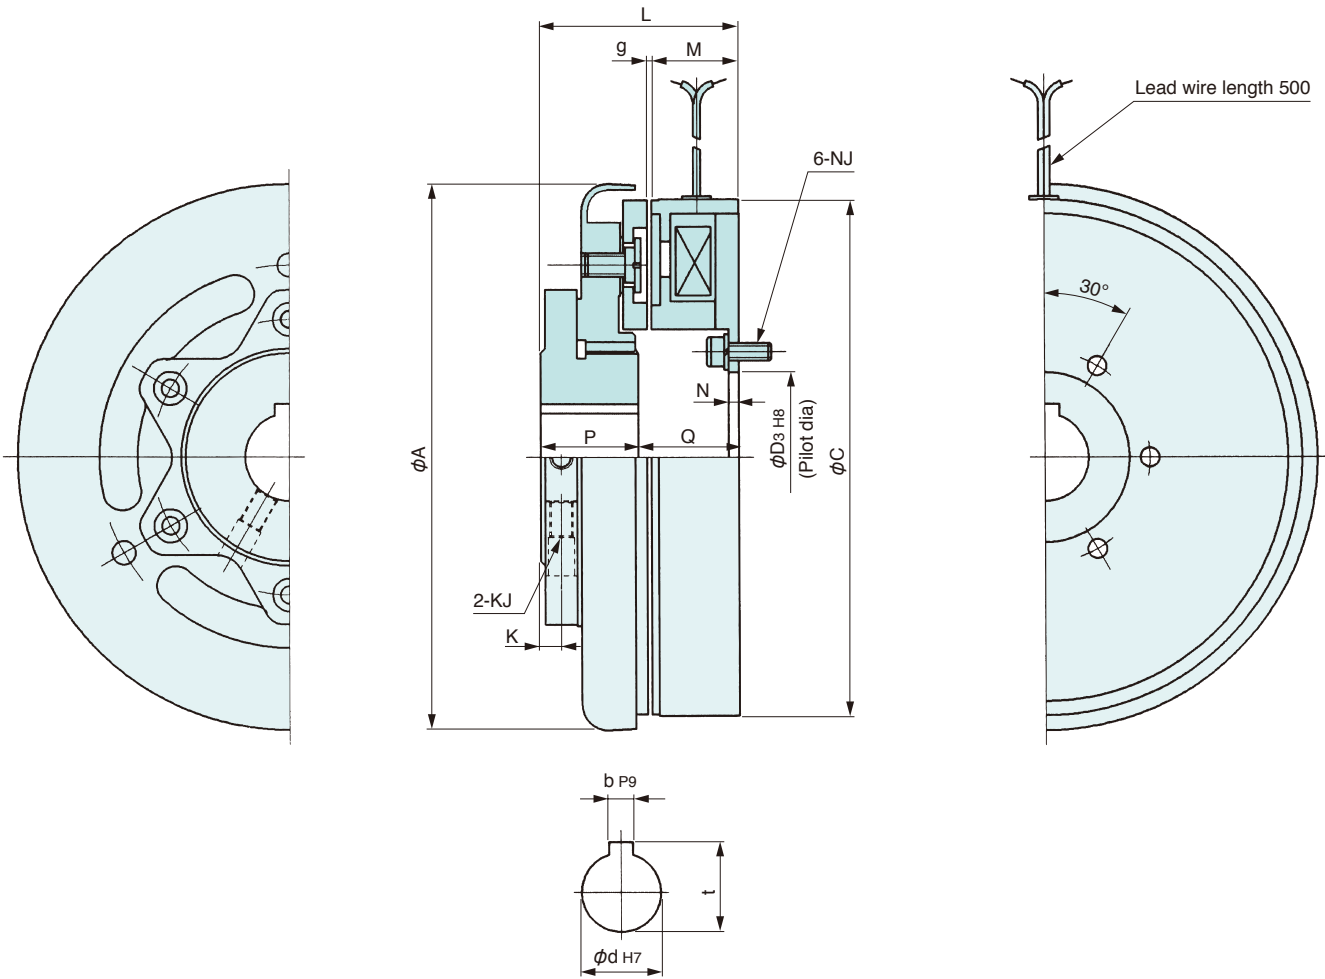

Unit : mm

Model	Diameter direction			Shaft direction					
	A	C	D ₃	L	M	N	P	Q	g
JB-10	186	175.7	58	68	31	3.5	33.5	34.5	0.5
JB-20	236	219	72	82	34.5	5	41.5	40.5	0.6
JB-40	288	271	90	98	40	6	51.5	46.5	0.6

Model	Attachment				Shaft hole		
	K	KJ	NJ				
			P.C.D	Bolt	d	b	t
JB-10	7	M8	72	M6×16	30	10	33.3 ^{+0.2} ₀
JB-20	8.5	M8	90	M8×20	40	12	43.3 ^{+0.2} ₀
JB-40	9.5	M10	112	M10×25	50	16	54.3 ^{+0.2} ₀