


Sprit Shaft Type Clutch

JCC-0.6, 1.2, 2.5, 5

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
JCC-0.6	6	24	8	0.85
JCC-1.2	12	24	11	1.5
JCC-2.5	25	24	16	2.7
JCC-5	50	24	23	4.3

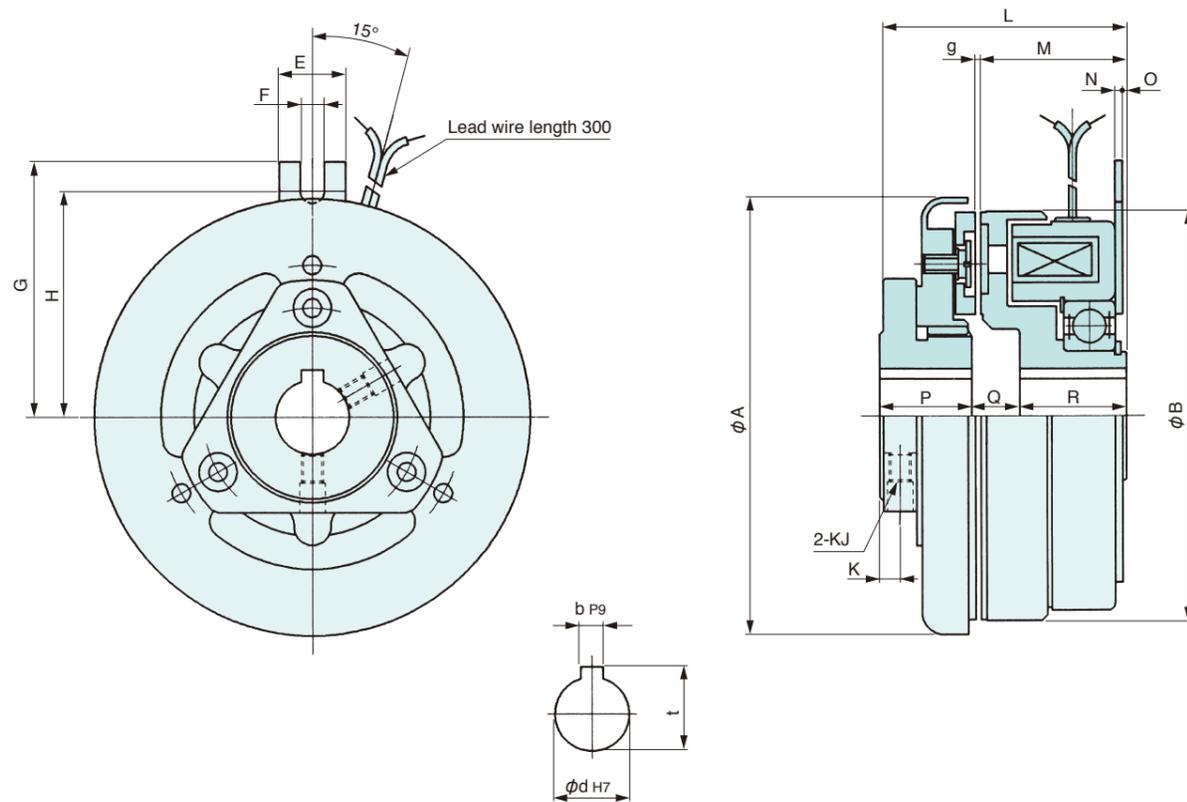

Unit : mm


Model	Diameter direction						Shaft direction			
	A	B	E	F	G	H	L	M	N	O
JCC-0.6	76	70.3	14	4.5	46	39.5	48	29	1.6	1
JCC-1.2	96	90.4	16	5.5	57	50	54	32	1.6	1
JCC-2.5	118	110.5	18	6.5	69	61	67	40.5	2.0	1
JCC-5	145	135.6	20	6.5	82	74	74	43.5	2.6	1

Model	Shaft direction				Attachment		Shaft hole		
	P	Q	R	g	K	KJ	d	b	t
JCC-0.6	18	9	21	0.4	4.2	M4	12	4	13.8 ^{+0.1} ₀
JCC-1.2	21	10	23	0.4	4.7	M5	15	5	17.3 ^{+0.1} ₀
JCC-2.5	25	13	29	0.5	5.5	M6	20	6	22.8 ^{+0.1} ₀
JCC-5	28	14	32	0.5	6	M8	25	8	28.3 ^{+0.2} ₀

Sprit Shaft Type Clutch

JCC-10, 20, 40

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
JCC-10	100	24	33	8.7
JCC-20	200	24	40	17.5
JCC-40	400	24	50	32.5

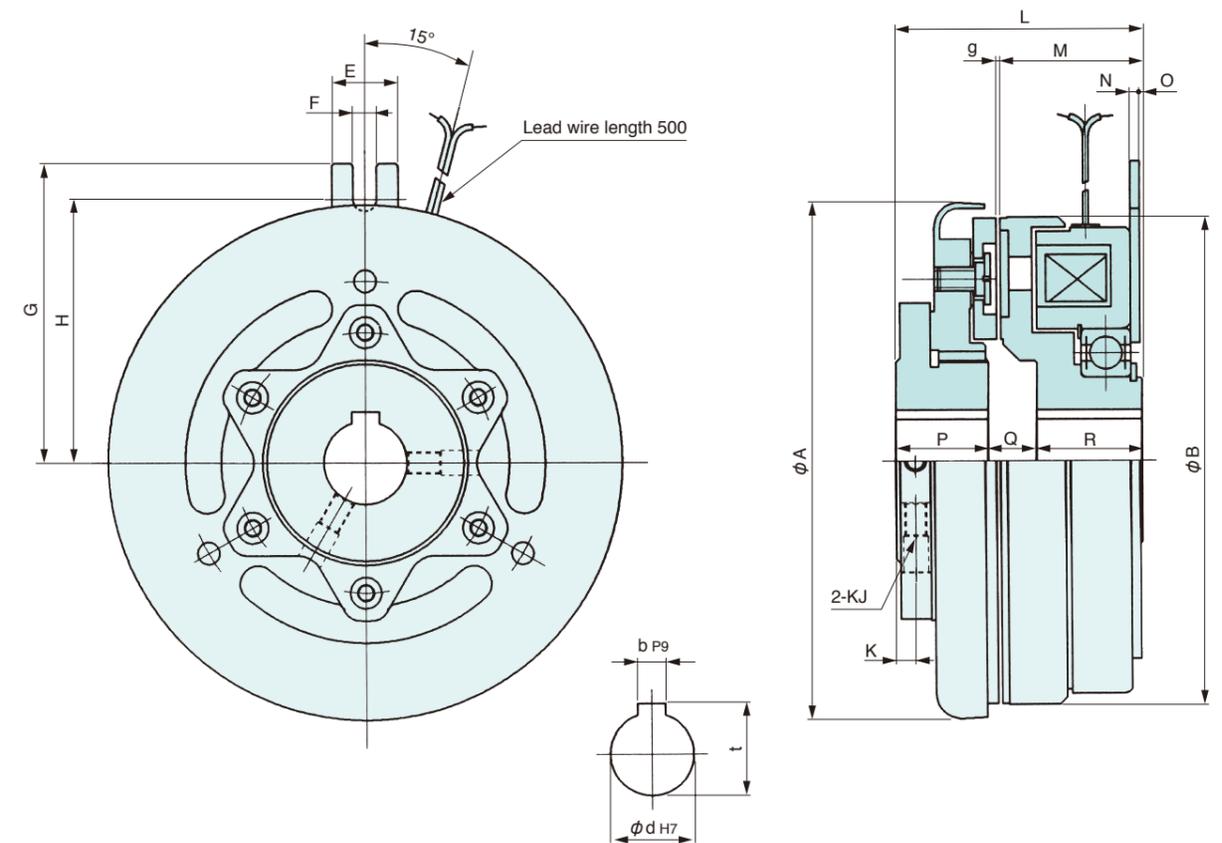

Unit : mm

Model	Diameter direction						Shaft direction			
	A	B	E	F	G	H	L	M	N	O
JCC-10	186	175.7	24	8.5	108	95	89	52	3.2	1
JCC-20	236	219	26	8.5	130	118	108	60.5	3.2	2
JCC-40	288	271	30	10.5	160	145	129	71	3.2	2

Model	Shaft direction				Attachment		Shaft hole		
	P	Q	R	g	K	KJ	d	b	t
JCC-10	33.5	17.5	38	0.5	7	M8	30	10	33.3 ^{+0.2} ₀
JCC-20	41.5	22	44.5	0.6	8.5	M8	40	12	43.3 ^{+0.2} ₀
JCC-40	51.5	25.5	52	0.6	9.5	M10	50	16	54.3 ^{+0.2} ₀