



Installation Example

NC(Pulley)

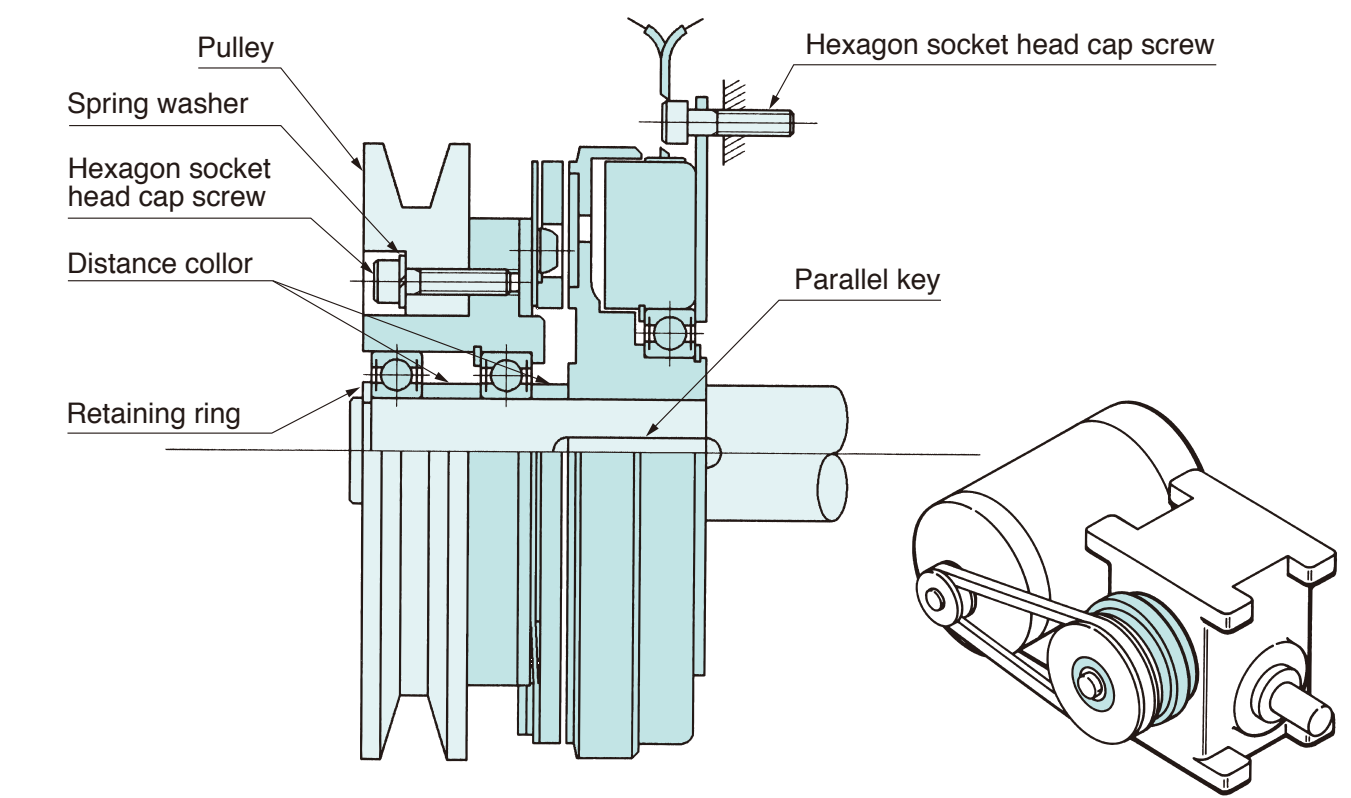


NB(Hub exterior)

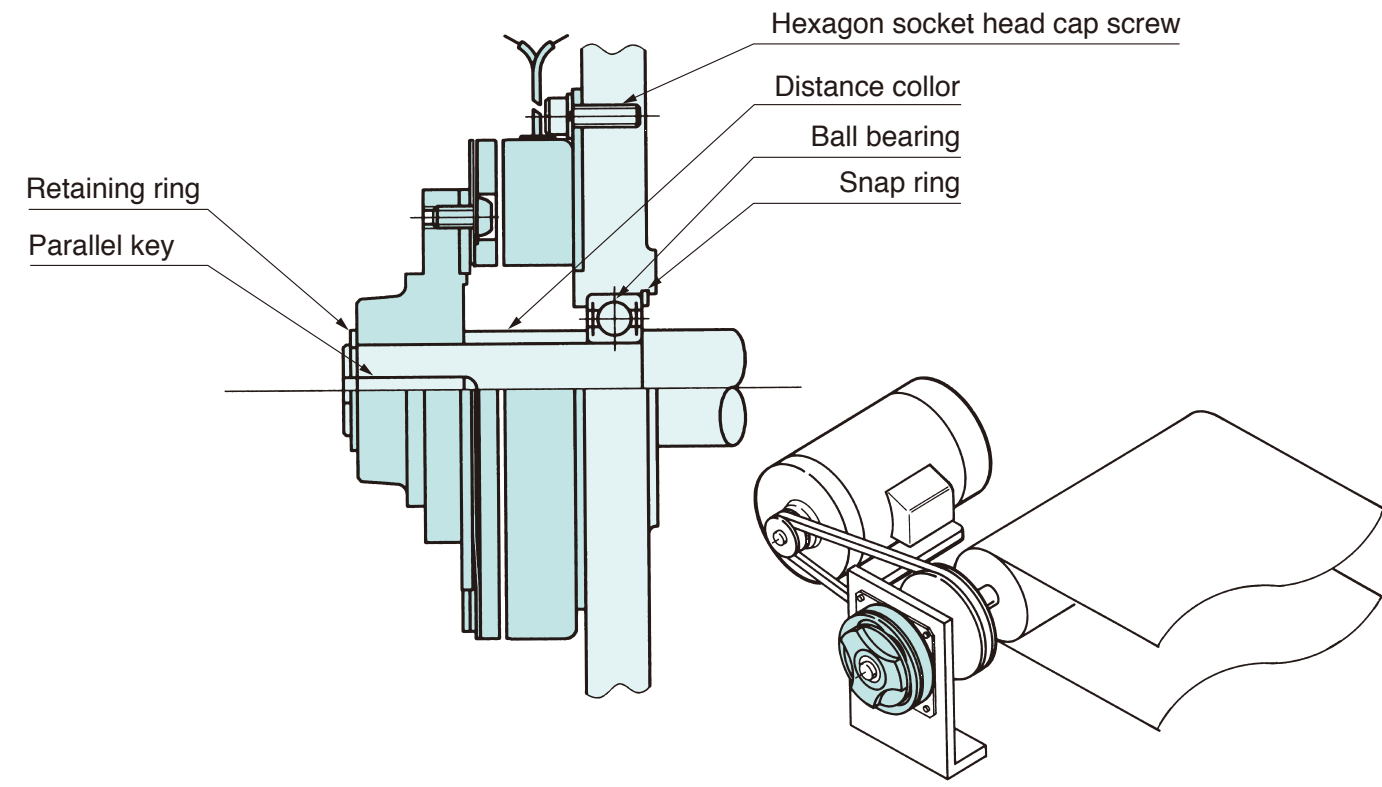

Non-Hub Clutch

NC-0.3, 0.6T, 1.2T, 2.5T, 5T, 10T, 20T

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
NC-0.3	3	24	5	0.22
NC-0.6-T	6	24	8	0.56
NC-1.2-T	12	24	11	1.0
NC-2.5-T	25	24	17	1.8
NC-5-T	50	24	25	3.0
NC-10-T	100	24	33	5.6
NC-20-T	200	24	42	11.0

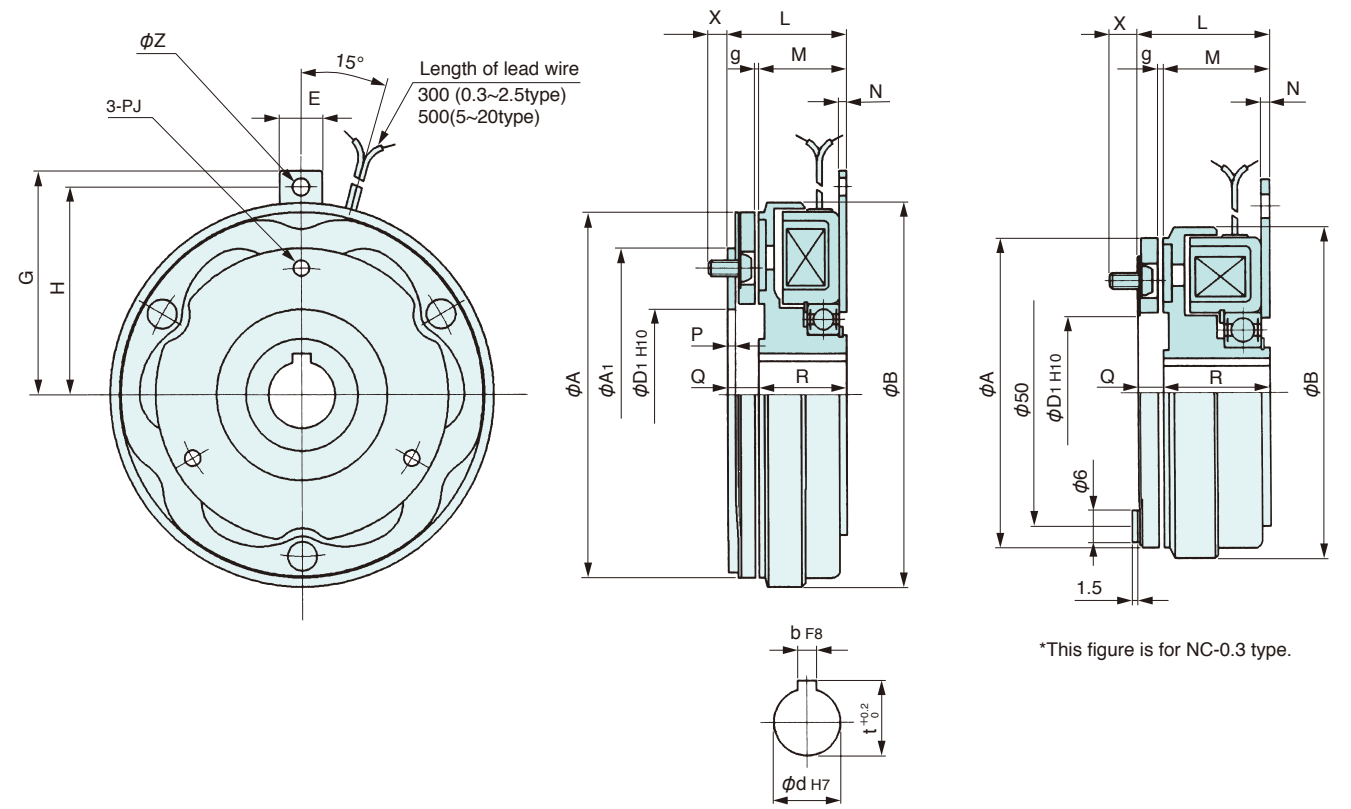

Unit : mm

Model	Diameter direction							Shaft direction								Attachment			Shaft hole		
	A	A ₁	B	D ₁	E	G	H	L	M	N	P	Q	R	g	X	P.C.D	Bolt	Z			
NC-0.3	58	—	62	29	10	40	35	24	20	1.6	—	4	20	0.3 ^{+0.1} ₀	5.5	42	M3×6	4.5	10	3	11.5
NC-0.6T	70	58	74	34	14	50	45	29	23	1.6	2	6	23	0.3 ^{+0.1} ₀	3	46	M3×6	4.5	12	4	13.5
NC-1.2T	88	72	92.5	42	16	62	56	32.5	25.5	2	2	7	25.5	0.3 ^{+0.1} ₀	4.5	60	M4×8	5.5	15	5	17
NC-2.5T	110	90	116	50	16	71	65	38	29	2	3	9	29	0.3 ^{+0.1} ₀	5.5	76	M5×10	6.5	20	5	22
NC-5T	137	110	144	64	16	84	78	43.5	33	2.6	3	10.5	33	0.3 ^{+0.15} ₀	7	95	M6×12	6.5	25	7	28
NC-10T	172	140	180	80	24	110	100	50.5	37	3.2	4	13.5	37	0.3 ^{+0.15} ₀	9.5	120	M8×16	8.5	30	7	33
NC-20T	218	180	228	100	24	135	125	60.5	43	3.2	5	17.5	43	0.4 ^{+0.2} ₀	14	158	M10×22	8.5	40	10	43.5