


Clutch(Naturally Cooled)

POC-0.3, 0.6, 1.2, 2.5, 5, 10, 20, 40

Model	Rated torque(Nm)	Rated voltage(DC-V)	Power consumption at 75°C(W)	Mass(kg)
POC-0.3	3	24	13.3	2.5
POC-0.6	6	24	22.5	3.5
POC-1.2	12	24	23	5.5
POC-2.5	25	24	30	10
POC-5	50	24	54	17
POC-10	100	24	52.8	35
POC-20	200	24	66	58
POC-40	400	24	92	100

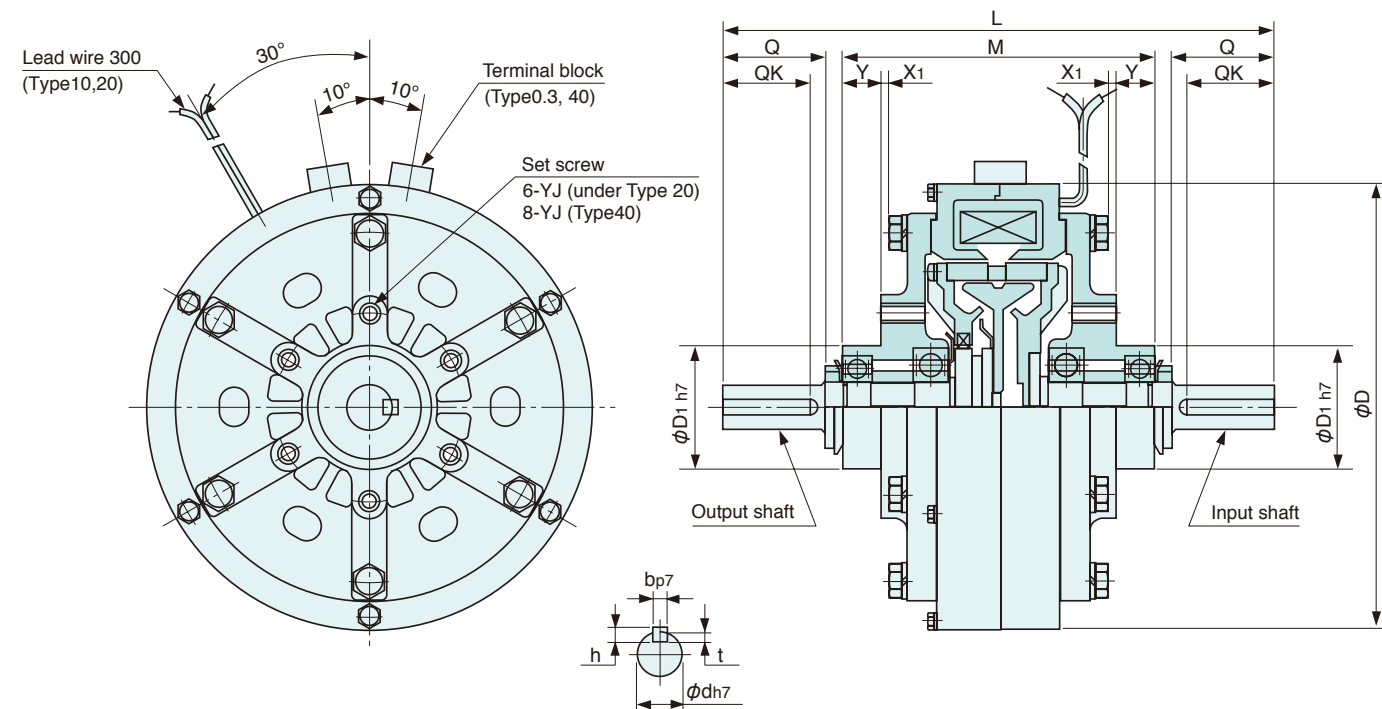

Unit : mm


Model	Diameter direction		Shaft direction				Attachment		Shaft end					
							YJ							
	D	D ₁	L	M	X ₁	Y	P.C.D	Tap	Q	QK	d	b	h	t
POC-0.3	120	42	147	87	5.8	11	64	M5×10	23	20	10	4	4	2.5
POC-0.6	134	42	155	90	2.2	10	64	M5×11	26	22	12	4	4	2.5
POC-1.2	152	42	188	106	3.5	13	64	M6×13	34.5	27	15	5	5	3
POC-2.5	182	55	227.5	123.5	2	15	78	M6×13	43	35	20	5	5	3
POC-5	219	74	284	151	2.5	23	100	M6×13	57	47	25	7	7	4
POC-10	290	100	348	192	7.5	25	140	M10×18	67	56	30	7	7	4
POC-20	335	110	382	216	10.5	25	150	M10×18	71	60	35	10	8	4.5
POC-40	395	130	490	278	22.5	33	200	M12×20	92	80	45	12	8	4.5

Clutch(Naturally Cooled)

Build-to-order product

POC-80

Model	Rated torque(Nm)	Rated voltage(DC-V)	Power consumption at 75°C(W)	Mass(kg)
POC-80	800	24	110	250

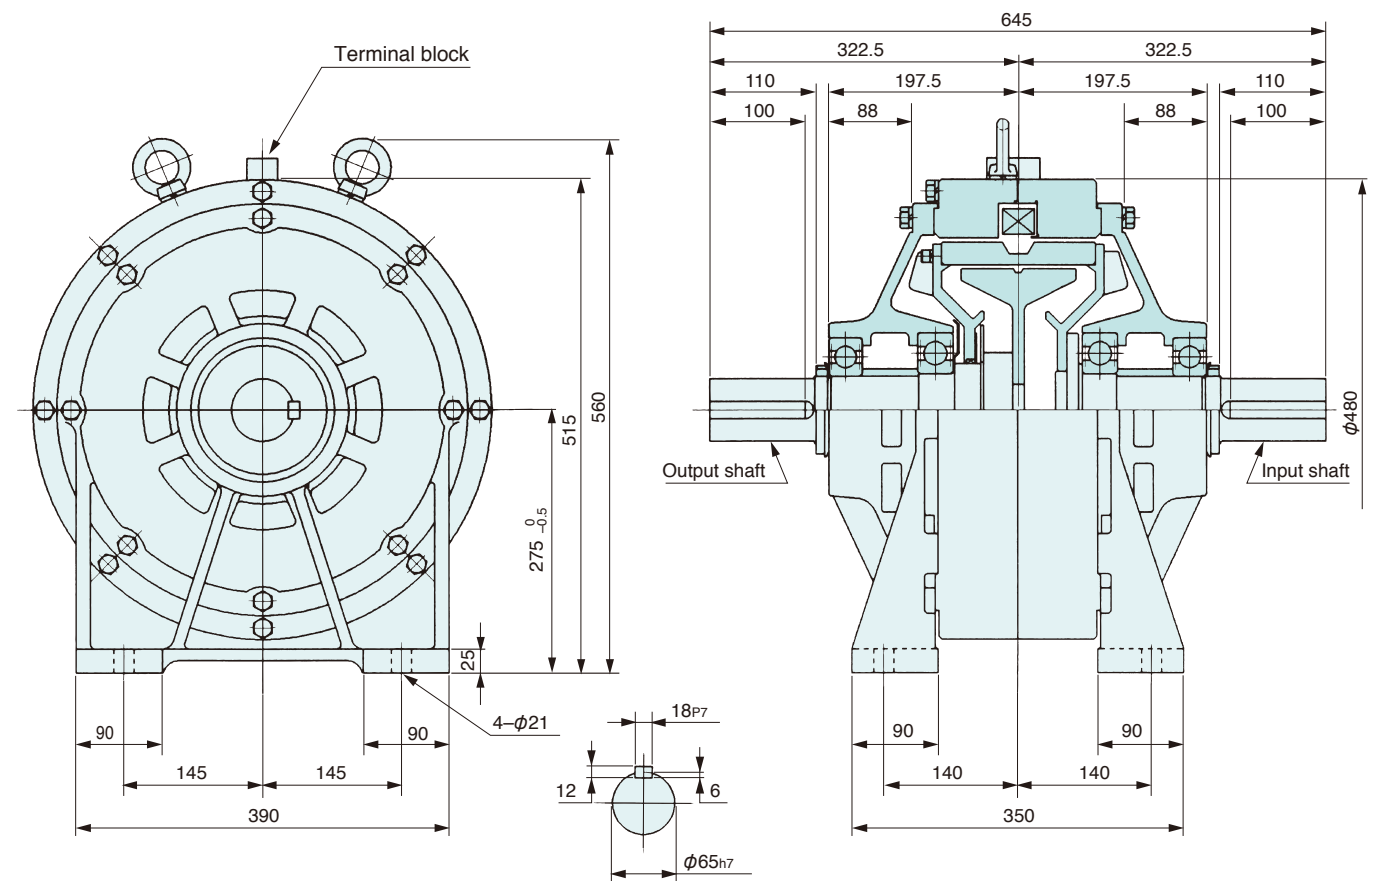

Unit : mm