
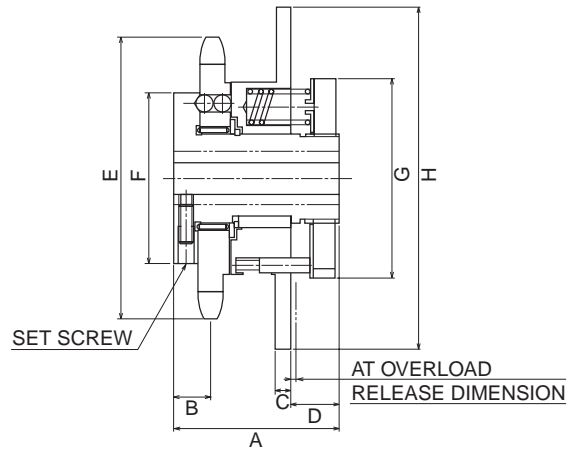


TX□B Type



● DIMENSION LIST

MODEL TYPE	A	B	C	D	φE	φF	φG	φH
TX15B-L · H · G	47	10.6	4	13.7	80	48	56	96
TX20B-L · H · G	53	11.6	4	15.1	92	62	68	108
TX30B-L · H · G	65	12.35	6	20.0	115	77	84	124
TX40B-L · H · G	75	15.85	6	20.3	138	96	108	148

● SPECIFICATION

MODEL TYPE	TORQUE RANGE N · m	SPRING COLOR × NO	MAX SPEED min ⁻¹	INERTIA MOMENT kg · m ²	WEIGHT kg	MAX HOLE DIA φmm	STANDARD HOLE DIA φmm	PREPARED HOLE DIA φmm	SET SCREW	RELEASE DIMENSION mm	SPROCKET	SPROCKET PCD
TX15B-L	7 ~ 24	WHITE × 10	900	0.625 × 10 ⁻³	1.0	15	15H7 × 5Js9	9	2-M4	1.5	#40 × 18T	73.14
TX15B-H	8 ~ 38	R E DX 5										
TX15B-G	13 ~ 50	R E DX 10										
TX20B-L	12 ~ 43	WHITE × 12	750	1.2 × 10 ⁻³	1.5	20	20H7 × 6Js9	12	2-M4	1.9	#40 × 21T	85.21
TX20B-H	16 ~ 70	R E DX 6										
TX20B-G	40 ~ 100	R E DX 12										
TX30B-L	14 ~ 72	WHITE × 12	600	3.4 × 10 ⁻³	3.0	30	30H7 × 8Js9	19	2-M4	2.6	#50 × 21T	106.51
TX30B-H	33 ~ 170	R E DX 6										
TX30B-G	72 ~ 200	R E DX 12										
TX40B-L	20 ~ 160	WHITE × 12	450	9.0 × 10 ⁻³	5.0	40	40H7 × 12Js9	24	2-M5	2.9	#60 × 21T	127.82
TX40B-H	43 ~ 330	R E DX 6										
TX40B-G	97 ~ 400	R E DX 12										

• Torque can be varied proportionally according to number of springs.
Number of springs can be used for minimum is three.

*Dimensions and specifications might be changed for improvement without notice.