


Flange Boss Type

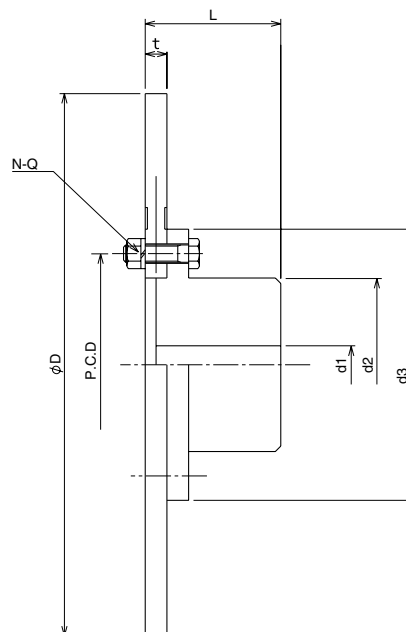


● DIMENSION LIST

Model Type	D	t	d ₁		d ₂	d ₃	L	P.C.D	N-Q
			Lower Hole	MAX					
DB-0525FB	500	20	35	95	160	250	125	205	8-M16
DB-0526FB	600	20	35	115	190	285	145	240	10-M16
DB-0527FB	700	20	50	130	215	305	165	260	12-M16
DB-0535FB	500	38	35	95	160	250	143	205	8-M16
DB-0536FB	600	38	35	115	190	280	163	240	10-M16
DB-0537FB	700	38	50	130	215	305	183	260	12-M16
DB-0538FB	800	38	50	150	250	340	208	295	12-M16
DB-0539FB	900	38	50	170	280	380	228	330	12-M18

● SPECIFICATION

MODEL TYPE	0525FB	0526FB	0527FB	0535FB	0536FB	0537FB	0538FB	0539FB
· MAX.ROTATION SPEED (min ⁻¹)	1150	950	820	1150	950	820	720	640
· INERTIA MOMENT (kg·m ²)	0.96	2.02	3.58	1.71	3.47	6.26	10.56	16.75
· WEIGHT (kg)	50	70	96	66	95	128	175	230

Water Cooled Disc

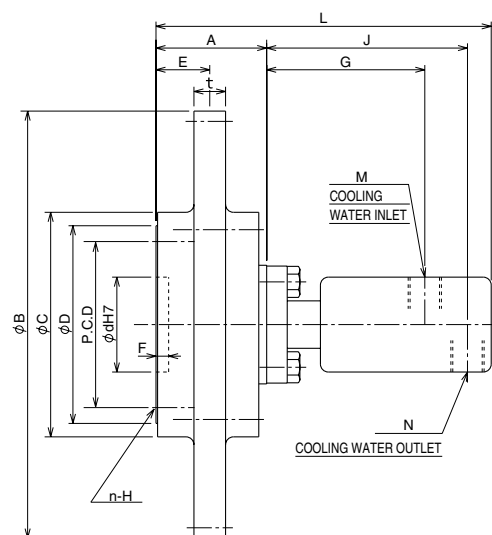

● SPECIFICATION

MODEL TYPE	0521T	0522T	0533T
· MAX.ROTATION SPEED (min ⁻¹)	1800	1500	1000
· INERTIA MOMENT (kg·m ²)	0.06	0.35	1.3
· WEIGHT (kg)	13	32	53

● DIMENSION LIST

Model Type	B	t	C	D	d	F	P.C.D	n-H	A	E	G	J	L	Horse Power	Water Volume	Cooling Water Pressure	M.N
DB-0521T	270	20	142	125	60	8	105	6-M10P1.5×18L	70	34	100	127	212	20	10ℓ/min	0.2MPa	Rc1/2
DB-0522T	350	20	216	180	100	10	150	6-M12P1.75×20L	76	40	100	127	218	30	15ℓ/min	0.2MPa	Rc1/2
DB-0533T	500	38	270	225	135	10	190	12-M16P×18L	84	45	111	143	245	40	20ℓ/min	0.2MPa	Rc3/4

*Dimensions and specifications might be changed for improvement without notice.