

Flange Type (Ventilation / Solid)



DB-0522H




DB-0521H

● DIMENSION LIST

Model Type	D	t	B	C	d H8	F	P.C.D	n-H	A	Remarks
DB-0511H	260	10.4	134	123	74	9	94	4-10.5	38.2	Solid Disc
DB-0521H	270	20	140	128	60	9	86	6-10.5	44	Ventilation
DB-0522H	350	20	210	160	85	14	116	8-12.5	35	"
DB-0531H	382	38	222	190	108	17	142	8-14.5	51	"
DB-0533H	500	38	-	260	130	18	180	8-16.5	50	"
DB-0534H	550	38	-	260	130	18	180	8-16.5	50	"

● SPECIFICATION

MODEL TYPE	0511H	0521H	0522H	0531H	0533H	0534H
· MAX.ROTATION SPEED (min ⁻¹)	2200	2200	1650	1500	1150	1050
· INERTIA MOMENT (kg·m ²)	0.03	0.05	0.11	0.28	1.0	1.48
· WEIGHT (kg)	3.8	5.3	10	18	35	43

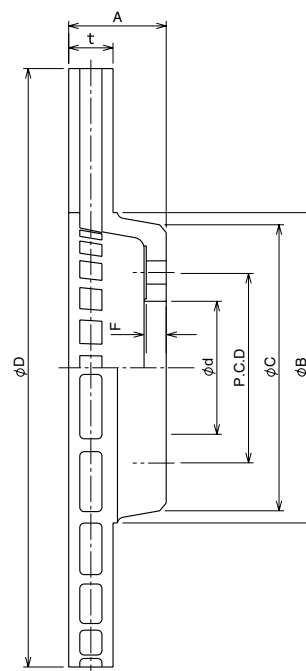

Boss Type



DB-0523E



DB-0511E

● DIMENSION LIST

Model Type	D	t	B	c	d		A	L
					Lower Hole	MAX		
DB-0511E	260	10.4	120	100	20	60	68	70
DB-0513E	350	10.4	210	100	30	60	100	110
DB-0523E	350	20	210	115	30	70	110	120
DB-0525E	500	20	360	150	35	90	130	140

● SPECIFICATION

MODEL TYPE	0511E	0513E	0523E	0525E
· MAX.ROTATION SPEED (min ⁻¹)	2200	1650	1650	1150
· INERTIA MOMENT (kg·m ²)	0.03	0.14	0.21	0.9
· WEIGHT (kg)	7.5	16	23	47

