


Through Shaft Type Clutch/Brake Unit

JEP-0.6, 1.2, 2.5, 5

Model	Static friction torque (Nm)	Rated voltage (DC-V)	Power consumption at75°C(W)		Mass(kg)
			Clutch	Brake	
JEP-0.6	6	24	8	8	2.6
JEP-1.2	12	24	11	11	4.5
JEP-2.5	25	24	16	14	8.4
JEP-5	50	24	23	20	14

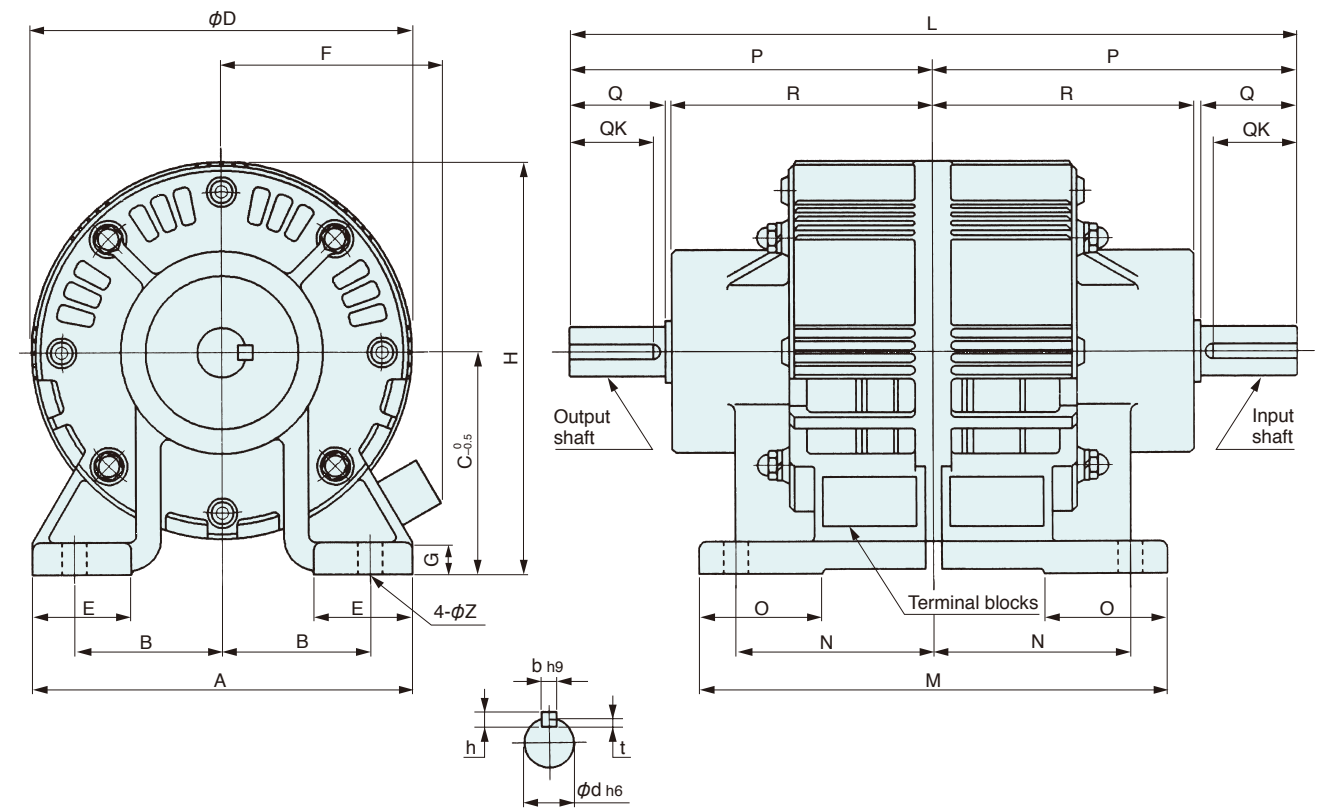

Unit : mm

Model	Diameter direction								Shaft direction		
	A	B	C	D	E	F	G	H	L	M	N
JEP-0.6	105	40	63	105	30	69	9	115.5	198	130	55
JEP-1.2	128	45	71	128	35	79	11	135	236	150	65
JEP-2.5	154	60	90	154	40	89	13	167	295	190	80
JEP-5	188	75	100	188	50	106	15	194	360	220	90


Model	Shaft direction				Shaft end					
	O	P	R	Z	Q	QK	d	b	h	t
JEP-0.6	30	99	72.5	7	25	18	12	4	4	2.5
JEP-1.2	40	118	86.5	7	30	25	15	5	5	3
JEP-2.5	50	147.5	106	10	40	34	20	6	6	3.5
JEP-5	60	180	128	12	50	38	25	8	7	4

Through Shaft Type Clutch/Brake Unit

JEP-10, 20, 40

Some are made to order.

Model	Static friction torque (Nm)	Rated voltage (DC-V)	Power consumption at75°C(W)		Mass(kg)
			Clutch	Brake	
JEP-10	100	24	33	31	29
JEP-20	200	24	40	40	60
JEP-40	400	24	50	46	100

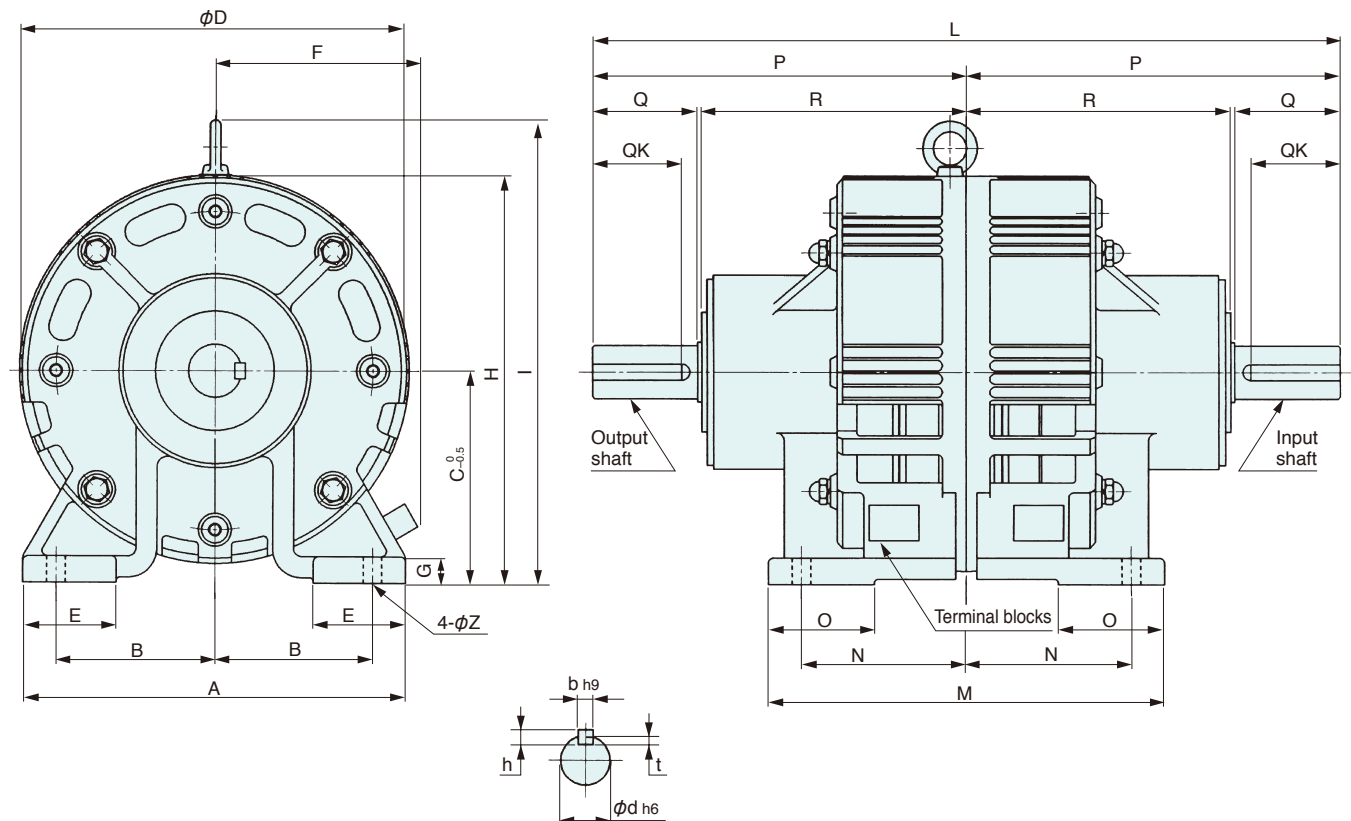

Unit : mm

Model	Diameter direction									Shaft direction	
	A	B	C	D	E	F	G	H	I	L	M
JB-10	234	95	120	234	60	127	20	237	—	430	260
JB-20	290	120	160	300	70	155	20	310	352	566	300
JB-40	340	140	180	354	80	177	24	357	408	680	360

Model	Shaft direction					Shaft end					
	N	O	P	R	Z	Q	QK	d	b	h	t
JB-10	110	70	215	152.5	14	60	46	30	10	8	5
JB-20	125	80	283	200	14	80	68	40	12	8	5
JB-40	150	90	340	237	18	100	84	50	16	10	6